



**KANOMAX**  
The Ultimate Measurements

# TABmaster MINI AIRFLOW CAPTURE HOOD

## MODEL 6750


The Kanomax TABmaster Mini Airflow Capture Hood is the perfect HVAC testing tool for residential or small space applications. Compact and lightweight, operators can quickly check supply and return airflow measurements in buildings. With its transparent hood design users can easily align with vent registers. Capable of recording up to 6000 data points, the TABmaster Mini also comes equipped with Bluetooth® wireless capability to wirelessly start/stop measurements and communicate with the Kanomax Smart App.

### Applications

- ◊ Ventilation testing
- ◊ Supply & return flow tests at small grill or register


### FEATURES AND BENEFITS

- ◊ Compact design for hard-to-fit applications
- ◊ Measure supply and return flow (both directions)
- ◊ Measure airflow & temperature simultaneously
- ◊ Compensate airflow readings based on ambient pressure
- ◊ Wireless communication with Smart App

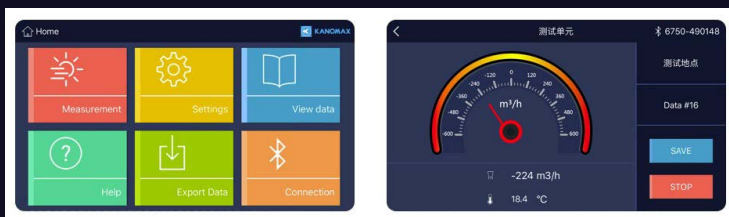

**KANOMAX USA, INC.**  
219 US HWY 206  
ANDOVER, NJ 07821 USA  
TEL: 973-786-6386  
FAX: 973-786-7586  
E-MAIL: SALES@KANOMAX-USA.COM  
URL: WWW.KANOMAX-USA.COM

**DISTRIBUTED BY:**



# PRODUCT SPECIFICATIONS

| FEATURE                  |  | VALUE   |
|--------------------------|--|---|
| Air Velocity             | <b>Range</b><br><b>Accuracy</b><br><br><b>Resolution</b> | +/- 8 to 600 m <sup>3</sup> /h<br>+/- 3% + 1 digit m <sup>3</sup> /h (@8to350 m <sup>3</sup> /h ranges)<br>+/- 5% + 1 digit m <sup>3</sup> /h (@350 to 600 m <sup>3</sup> /h ranges)<br>1 m <sup>3</sup> /h         |
| Temperature              | <b>Range</b><br><b>Accuracy</b><br><b>Resolution</b>     | 0 to 50°C<br>+/- 0.5°C<br>0.1°C   |
| Power Supply             |  | 4 x AA batteries or AC adapter  |
| Operating Temperature    |  | 0 to 50°C (with no condensation)  |
| Storage Temperature      |  | -10 to 50°C (with no condensation)  |
| Datalogging              |  | Up to 6000 measurements   |
| Interface                |  | 2.4 x 4.7 x 1.2 inches (60 x 120 x 34 mm)   |
| Power Supply             |  | 4 x AA batteries or AC adapter  |
| Standard Hood Dimensions |  | 1.16 x 1.16 inches (355 mm x 355) mm  |
| Weight                   |  | 3.3 lbs. (1.5 kg)   |
| Warranty                 |  | 1 year  |
| What's Included          |  | Instrument (meter, standard hood, rod, meter fixture, meter cable)<br>Carrying case<br>USB cable<br>4 x AA batteries<br>Software (provided with CD-ROM)<br>User manual<br>Calibration certificate with a test sheet |

*\*Specifications are subject to change without notice.*