


Smart CTA Model 7250

Professional and Compact Hot-Wire Anemometer with an Excellence of Analog Circuit !!



Smart CTA system

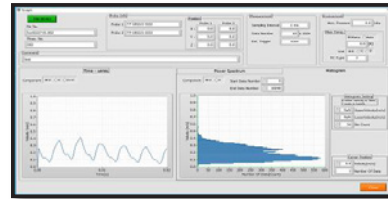

<software example>
time-series variation and velocity histogram (with an I-type probe)



<software example>
time-series variation and frequency (with a X-type probe)

<System Configuration Example>

- Smart CTA Main Unit
- Probe
- Probe Support and Cable
- Interface (Expansion Chassis, A/D, DI, Thermocouple input module)
- PC
- Software

Features:

- 2 channels of CTA integrated in one unit, extended up to 16 channels
- Compact and Easy to Use
- Frequency response max. 20 kHz
- Exclusive software supports from probe calibration to measurement
- Responsiveness optimization possible with integrated square wave generator

Applications:

- Airflow investigation in wind tunnel
- Investigation or measurement of airflow turbulence of fan-casings, buildings etc.
- Investigation on noise generated by airflow

Specifications (Main Unit):

Method	Constant Temperature Anemometry (CTA)	
Bridge	Channel Number	2
	Bridge Ratio	12:1
	Set Resistance (for probe)	4.5~45Ω
	Current Supply to Probe	< 350mA
Feedback Circuit	Output Voltage Range	0~10V DC
	Frequency Response	< 20kHz
Operating Environment	5~35°C 20~90%RH *w/o condensation	
Power Supply	AC100/120/220/240V 50/60Hz (set prior to delivery)	
Dimension	320x88x280mm	
Weight	approx. 3.8kg	

Smart CTA main unit



KANOMAX USA, INC.

219 US HWY 206

ANDOVER, NJ 07821 USA


TEL: 973-786-6386

FAX: 973-786-7586

E-MAIL: SALES@KANOMAX-USA.COM

URL: WWW.KANOMAX-USA.COM

DISTRIBUTED BY:





KANOMAX
The Ultimate Measurements




- ※ dimension is in "mm"
- ※ one set of each type contains 6 probes
- ※ no tester to be used for probe resistance measurement, which causes breakdown
- ※ please inquire for request on other prong length or dimension

Probes



General Purpose Single Probe

- 0251R-T5 (φ 5μm Tungsten)
- 0251R-PI5 (φ 12μm Platiniridium)
- 0251R-P25 (φ 25μm Platinum)





End Flow X Probe

0252R-T5

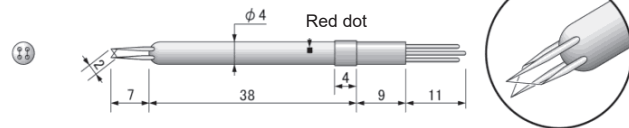



45°slanting sensor Probe

0253R-T5

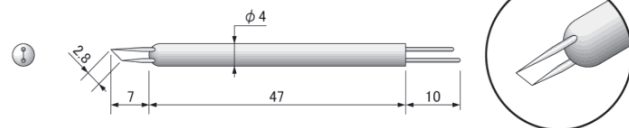


End Flow Parallel Sensor Probe

0254R-T5

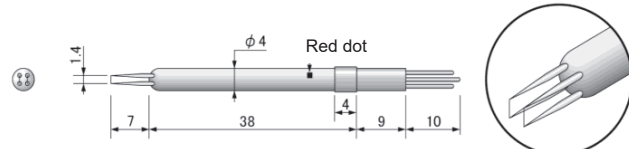


90°parallel sensor Probe

0247R-T5

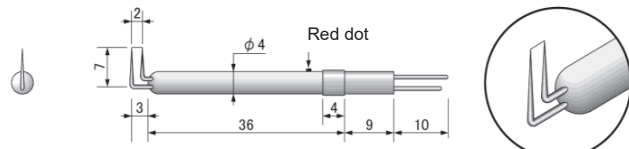


90°perpendicular sensor Probe

0248R-T5

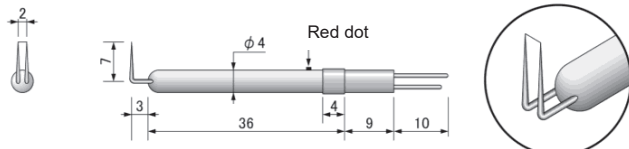



90°Cross Flow X Probe

0249R-T5

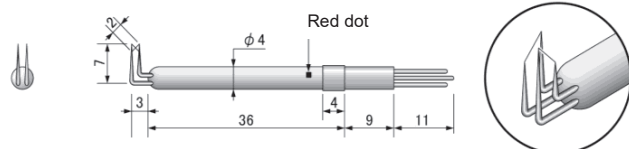


Standard Cross Flow X Probe

- 0250R-T5 (φ 5μm Tungsten)
- 0250R-PI5 (φ 12μm Platiniridium)
- 0250R-P25 (φ 25μm Platinum)

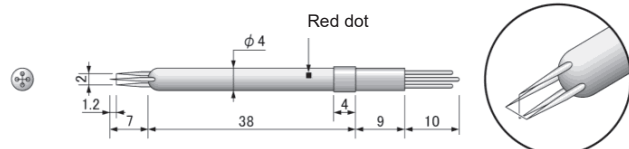

Supports


MODEL 0102 · 0103 · 0104

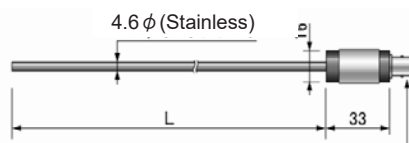

Model	Length
0102	155mm
0103	459mm
0104	917mm

BNC connector

MODEL 0106 · 0107 · 0108

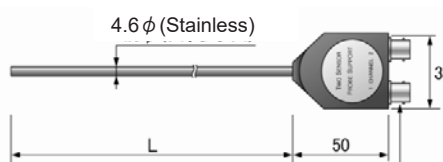

Model	Length
0106	147mm
0107	451mm
0108	909mm

BNC connector

Hot-Wire Anemometer Smart CTA